


Vrouwelijke vlakstekkers

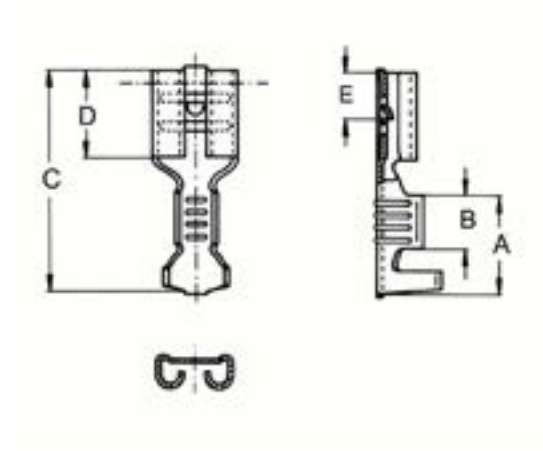

Voor fijn- en zeer fijnaderige geleiders, bijv. volgens DIN EN 60228 kl. 5 en 6

MAT.: Messing VERTIND: Ja

Art. nr.	MM ² KABEL	AFM. A	AFM. B	AFM. C	AFM. D	BRDTE STEKKER	DIKTE STEKKER
1825/1	0.5 - 1	5	2.8	12.5	5	2.8	0.5
1825/1A	0.5 - 1	5.5	2.5	12.5	5	2.8	0.8
1820/1A	0.5 - 1	5.5	2.5	14	6.3	2.8	0.8
1820/2	0.5 - 1	6	3.4	15.6	6	4.8	0.5
1820/3	0.5 - 1	6	3.4	15.6	6	4.8	0.8
1720	0.5 - 1	8.5	4.5	19	7.4	6.3	0.8
1830/3	1.5 - 2.5	6	3.4	15.6	6	4.8	0.8
1730	1.5 - 2.5	8.5	4.5	19	7.4	6.3	0.8
1750	4 - 6	8.5	4.5	19	7.4	6.3	0.8