


## Gaine flexible - type SS

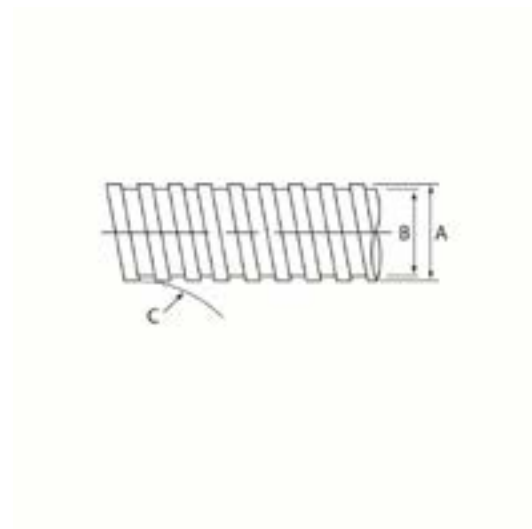

Pour utilisation avec nipples S

MATIÈRE: Inox 316 (V4A) TYPE: SS VALEUR IP: IP40 COULEUR: métal ZONE C° DYN.: -45 - +250 PLGE C° STAT.: -400

Art. nr.	Ø INT.	Ø EXT.	LONG.
SS16/50M	13	16	50
SS20/25M	16.9	20.5	25
SS25/25M	21.4	25	25
SS16/25M	13	16	25
SS12/25M	10.3	13	25
SS10/25M	6.8	9	25
SS32/25M	28.1	32	25